

Jacquet Weston Engineering

Mk III 'Eighteen-Ten'

Barrel Plating Unit



The latest Mk III barrel unit is fitted with a mild steel extended tank with immersed anode rail. It can also be supplied with a rubber or plastic lined tank, with a modified anode rail which is above solution level.

Features

The polypropylene barrel will withstand temperatures up to 70°C. Suitable for most electroplating processes, (except chrome). All bearings easily replaced. Off the shelf spares.

Specification

Tank:

8 gauge, mild steel and/or mild steel rubber/plastic lined.

Length: 84cm(33")
Width: 84cm(33")
Depth: 84cm(33")

Overall Dimensions

Height 1.22metres(4'0")
Excluding balance weight
Width: 1.22 metres(4'0")

Tank fitted with:


Barrel drive motor unit, 0.125hp,
380/400 or 400/440 volts, 3 phase, 50 cycles
MEM starter.

Electroplating Barrel:

18" x 10" (45.75cm x 25.5cm).
Manufactured in polypropylene 6mm (1/4")
sheet with 3mm (1/8") diameter holes.
Contacts, 75mm cable with hose
protection.

Mild steel top rig is plastic coated.
Polypropylene chute and gear guard.

Finish: Chlorinated rubber paint.

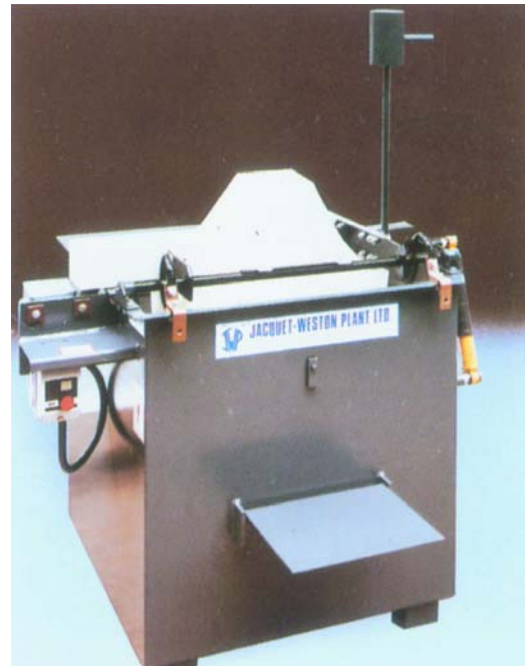

Jacquet Weston Engineering, Tower Works, Membury Airfield,
Ramsbury Road, Lambourn, Hungerford, Berks, RG17 7TJ

WWW.JWELTD.COM